



Fiberglass Ladders & Platforms

Swivel Hook Ladders

Hook Ladders come standard with 8" hooks though 14" and 18" hooks can be special ordered. Standard Duty Ladders have 2" side rails and Heavy Duty Ladders have 2-1/2" side rails. Both styles of ladders have 14-1/2" rungs.



Regular Duty Ladders

Part #	Length	Weight
H4904-8	8'	42 lbs.
H4904-10	10'	46 lbs.
H4904-12	12'	52 lbs.
H4904-14	14'	60 lbs.
H4904-16	16'	68 lbs.

Heavy Duty Ladders

Part #	Length	Weight
H4905-8	8'	47 lbs.
H4905-10	10'	55 lbs.
H4905-12	12'	63 lbs.
H4905-14	14'	70 lbs.
H4905-16	16'	76 lbs.
H4905-18	18'	85 lbs.
H4905-20	20'	98 lbs.

Spliced Ladders

Spliced Ladders can be combined to reach lengths up to 32 feet. They have 2-1/2" rails and top sections are provided with 8" hooks complete with chains.

Part #	Description	Weight
C402-0482	10' Top Section	44 lbs.
C402-0402	12' Top Section	48 lbs.
C402-0404	14' Top Section	52 lbs.
C402-0407	16' Top Section	56 lbs.
C402-0411	20' Top Section	64 lbs.

Part #	Description	Weight
T402-0423	10' Middle Section	44 lbs.
C402-0418	8' Bottom Section	28 lbs.
C402-0421	10' Bottom Section	32 lbs.
C402-0422	12' Bottom Section	36 lbs.

Insulated Platforms

Part #	Length	Weight
C402-1042	4'	49 lbs.
C402-1043	6'	56 lbs.
C402-1079	8'	60 lbs.

Epoxiglas Insulated Platforms

Insulated Platforms feature 12" of clear insulation provided by two 2" diameter poles connecting the platform to the mounting bracket. Order mounting brackets, tripods or railings separately.

Mounting Brackets

Part #	Description	Weight
M4901-10W	Fixed Pole Mount	9 lbs.
M4901-21	Fixed Tower Mount	10 lbs.
C402-1164	Pivot Base for 42" & 4' Platforms	28 lbs.
C402-1173	Pivot Base for 6' & 8' Platforms	29 lbs.

Tripods & Railings

Part #	Description	Weight
H4964	Tripod for 4' Insulated Platform	9 lbs.
C402-1055	Railing for 4' Insulated Platform	13 lbs.
C402-0023	Railing for all 6' Platforms	15 lbs.
C402-0024	Railing for all 8' Platforms	17 lbs.



Shown with Optional Pivot Base and Tripod



TOLL FREE 877-860-5666

FAX 630-860-5669 www.tallmanequipment.com



Fiberglass Extension Arms

Round Epoxiglas Extension Arms

These arms are designed for use on voltages up to 15kV. They can also be used on voltages up to 34.5kV by fitting the wireholders with an insulator. The maximum vertical load is 150 per wireholder lbs except the C400-1310 which has a 300 lbs rating.




Part # M4805-7
Insulator



Part #	Dimensions	# of Wire Holders	Crossarm Size	Weight
H4800-60	2-1/2" x 5'	1	3-3/4" x 4-3/4"	11-1/2 lbs.
H4800-72	2-1/2" x 6'	2	3-3/4" x 4-3/4"	13 lbs.
C400-1310	3" x 6'	2	3-3/4" x 4-3/4" & 6" x 6"	24 lbs.
T403-2417	2-1/2" x 6'	2	3-3/4" x 4-3/4" & 6" x 6"	15 lbs.

Super "U" Extension Arms

The "U" shaped profile gives these arms a load rating of 200 lbs per wireholder. These arms are furnished with an insulator on each wireholder giving them a 35kV rating.

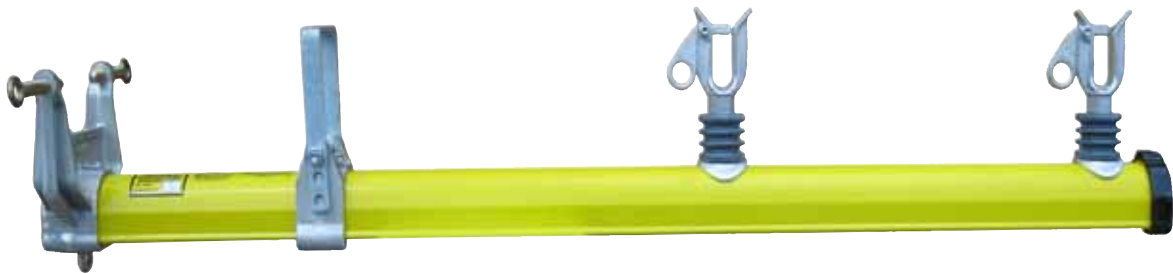

Part #	# of Wire Holders	Crossarm Size	Weight
7545	2	4-1/4" x 6-3/4"	18.8 lbs.
7547	1	4-1/4" x 6-3/4"	15.4 lbs.


Call Tallman to *RENT* Ladders & Hot Arms!
877-860-5666



Fiberglass Conductor Supports & Gins

Round Conductor Support Arms

Insulated temporary conductor supports to hold energized distribution conductors up to 15kV. For higher voltages, use M4805-7 insulator. The working load is 150 lbs per wireholder on the T400-1939 and 200 lbs on the T400-1940.

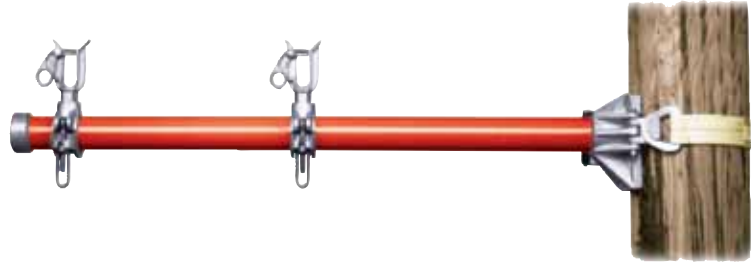

Part #	# of Wire Holders	Length	Weight
T400-1940	1	30"	14 lbs.
T400-1939	2	48"	18 lbs.

Super "U" Conductor Support Arms

Designed for reconductoring and maintenance of line voltages up to 34.5kV. They have a load rating of 200 lbs per wireholder and a 44" long ratcheting nylon strap binder.



Part #	# of Wire Holders	Length	Weight
5045	1	34-3/4"	14.3 lbs.
5047	2	49-7/8"	18 lbs.



Part # H20 Transformer Gin
The yoke casting fits over most distribution crossarms. At a maximum 30° angle from vertical, it has a load rating of 750 lbs.



Part # T400-1938 Transformer Gin
This ratcheting strap type transformer gin has a 5" extended base. The maximum rating is 2,000 lbs. and the 2" x 44" strap fits most structures.



Part # 5800-5 Transformer Gin
The eye of this ductile iron gin stands 10-5/8" off of the pole. It comes with a ratcheting strap binder and the working load limit is 1,900 lbs.